



OPEN

1. Place the Industrial Gazebo on a level surface, open slightly, then put on the canopy (leave it loose, and do not place over the corners at this stage.)



2. Two people should stand at opposite sides of the Gazebo. Each person should then pull their side of the Gazebo so the joints slide up the corner poles. When the corner joints are nearly at the top, they will need to be clicked one by one into place. Then place the corners of the canopy over each edge and fully attach all the Velcro straps to fully secure the canopy.

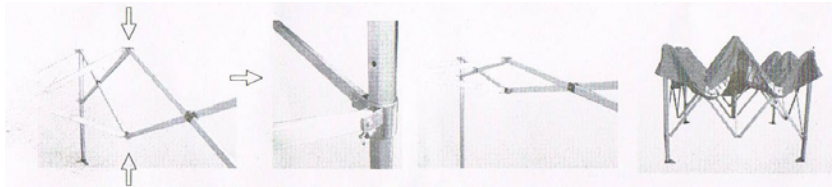

3. To raise the height of the gazebo, pull the rings on the attachment at the bottom of the Gazebo legs (this will unlock the legs and allow them to be raised) Two people should raise one side at a time in a synchronized motion. Repeat this process until the gazebo is at your desired height.



4. There are 5 height positions to choose from, please make sure they are all clicked on the same setting.




5. Ensure that the Gazebo is securely pegged and tied down (using the guide ropes and pegs provide.)




CLOSE

1. Undo all the pegs and guide ropes, then lower the legs by pulling out the ring on the attachment at the bottom of the gazebo legs. 2 people should lower two legs at a time in one synchronized motion.



2. Once the legs are lowered lift the canopy from the edges of the Gazebo. Then Pull the ring and release each corner piece and slide each one down easing them down. Two people should stand at opposite ends and walk towards each other allowing the gazebo to fold into its compacted position.



3. Open the carry bag and insert over the Gazebo, for ease of transportation and neat storage.



WARNING: DO NOT LEAVE ERECTED IN ADVERSE WEATHER CONDITIONS. DO NOT LEAVE UNATTENDED. DO NOT USE UNDUE FORCE DURING ERECTION OR DISMANTLING. DO NOT LIGHT FIRES OR BARBECUES UNDER THE STRUCTURE. ALWAYS MAKE SURE THE STRUCTURE IS SECURELY ANCHORED.